## **EUROPEAN PATENT OFFICE**

## **Patent Abstracts of Japan**

PUBLICATION NUMBER

10062966

PUBLICATION DATE

06-03-98

APPLICATION DATE

13-08-96

APPLICATION NUMBER

08231330

APPLICANT: SHIN ETSU CHEM CO LTD;

INVENTOR:


KASHIDA SHU;

INT.CL.

G03F 1/14 H01L 21/027

TITLE

PELLICLE FOR LITHOGRAPHY

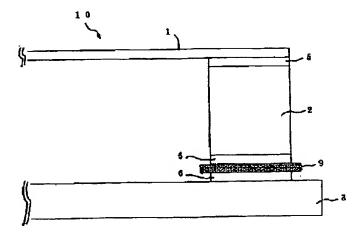

ABSTRACT: PROBLEM TO BE SOLVED: To prevent production of dust and to avoid such problems that a pellicle film expands and break even when environmental conditions such as external air or temp. change by providing an adhesive layer with an aeration filter to adhere and fix a pellicle to an exposure master plate.

> SOLUTION: This pellicle consists of a pellicle film 1, frame 2, and adhesive layer 6 in such a manner that the pellicle film 1 is adhered to the upper face of the frame 2 with an adhesive 5 or a good solvent of the pellicle film 1, that the adhesive layer 6 is formed on the lower face of the frame 2 and that the frame is adhered and fixed to an exposure master plate 3. The adhesion layer 6 is provided with an aeration filter 9 so that air can be passed between the inside and outside of the pellicle. Thereby, a sealed state in the frame 2 can be avoided and such a problem that the pellicle film 1 expands or sinks is avoided even when environmental conditions, especially the atmospheric pressure or temp. change.

COPYRIGHT: (C)1998,JPO